


# Gas Kart Assembly Instructions

**Parts List:** Gas Kart tank with hose, 2 wheels, 1 axle, 2 axle brackets, 2 pal nuts, four 3/4" 1/4" machine screws, four 1/4" washers and 6 large washers.

**Tools needed:** Hammer and Phillips screwdriver

1. Place one of the pal nuts on a hard surface, concave side up. Insert the axle into the nut and tap with the hammer to seat the axle.
2. On the axle, place a large washer, a tire, 2 large washers, a tire and a large washer. Place the 2nd pal nut on the axle and tap with the hammer to seat the nut.
3. With the back of the tank facing up, center the axle in the axle channel.
4. Line up the holes in the mounting plates with the molded-in T-nuts and attach with the 1/4 machine nuts and washers. Tighten securely after making sure axle is centered and wheels turn freely.

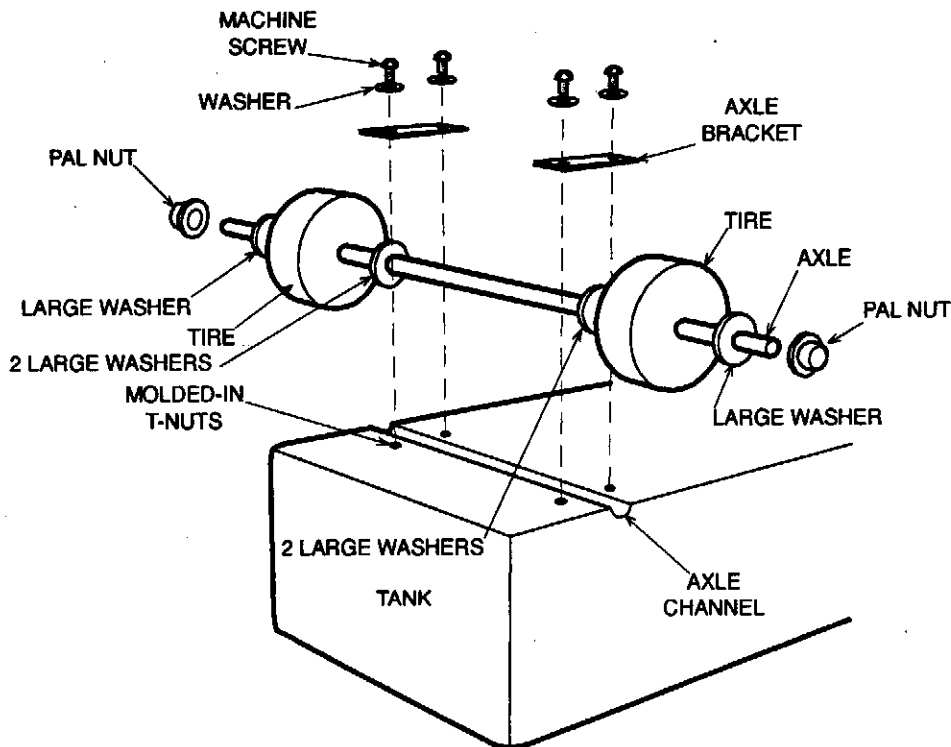

**TRACY**  
international

**YACHTING ACCESSORIES**

530 Wellington Ave., Cranston, RI 02910 USA

Gas Kart Assembly Instructions 3/03 Product Number WP-1